

**NEW UTILITY PATENT APPLICATION
TRANSMITTAL***(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))*Docket No.
M4065.0361/P361Total pages in this
submission**TO THE ASSISTANT COMMISSIONER FOR PATENTS****Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

ELECTRO-MECHANICAL POLISHING OF PLATINUM CONTAINER STRUCTURE

and invented by:

Whonchee Lee and Scott Meikle**IF A CONTINUATION APPLICATION**, check appropriate box and supply requisite information:☐ Continuation ☐ Divisional☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 27 pages(s) and including the following:
 - a. ☒ Descriptive title of the invention
 - b. ☐ Cross references to related applications *(if applicable)*
 - c. ☐ Statement regarding Federally-sponsored research/development *(if applicable)*
 - d. ☐ Reference to microfiche appendix *(if applicable)*
 - e. ☒ Background of the invention
 - f. ☒ Brief summary of the invention
 - g. ☒ Brief description of the drawings *(if drawings filed)*
 - h. ☒ Detailed description
 - i. ☒ Claims as classified below
 - j. ☒ Abstract of the disclosure

Application Elements (continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 U.S.C. 113)
- ☒ Formal ☐ Informal Number of sheets: 9
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 C.F.R. 1.63(d) (for continuation/divisional applications only))
- c. ☐ With Power of Attorney ☒ Without Power of Attorney
5. ☐ Incorporation by reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer program in microfiche
7. ☐ Genetic sequence submission (if applicable, all must be included)
- a. ☐ Paper copy
- b. ☐ Computer readable copy
- c. ☐ Statement verifying identical paper and computer readable copies

Accompanying Application

8. ☐ Assignment papers (cover sheet & document(s))
9. ☒ 37 C.F.R. 3.73(b) statement (when there is an assignee)
10. ☐ English translation document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certified copy of priority document(s) (if foreign priority is claimed)
15. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Label No.: _____)
16. ☐ Small Entity statement(s) -- # submitted _____ (if Small Entity status claimed)

Accompanying Application (continued)

- 17.
- ☐
- Additional enclosures (please identify below):

Fee Calculation and Transmittal

The filing fee for this utility patent application is calculated and transmitted as follows:

- ☒
- Large Entity
- ☐
- Small Entity

<u>CLAIMS AS FILED</u>						
For	# Filed	# Allowed	# Extra	Rate	Fee	
Total Claims	48	- 20 =	28	x \$18.00	\$504.00	
Independent Claims	10	- 3 =	7	x \$78.00	\$546.00	
Multiple Dependent Claims (check if applicable)				<input type="checkbox"/>		
Other Fees (specify purpose):						
				BASIC FEE	\$690.00	
				TOTAL FILING FEE	\$1,740.00	

- ☒ A check in the amount of \$1,740.00 to cover the total filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and Deposit Account No. 4 - 1073 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.31(b).


Dated: August 31, 2000

Thomas J. D'Amico
 Attorney Reg. No.: 28,371
 Dickstein Shapiro Morin & Oshinsky LLP
 2101 L Street NW
 Washington, DC 20037-1526
 (202) 785-9700

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR U.S. LETTERS PATENT

ELECTRO-MECHANICAL POLISHING OF
PLATINUM CONTAINER STRUCTURE

Inventors:

Whonchee Lee

Scott Meikle

Dickstein Shapiro Morin &
Oshinsky LLP
2101 L Street NW
Washington, DC 20037-1526
(202) 785-9700

FIELD OF THE INVENTION

The present invention relates to a method of electro-mechanical polishing (EMP) surfaces, especially surfaces of platinum container structures, during semiconductor device fabrication.

BACKGROUND OF THE INVENTION

As the dimensions of semiconductor devices continue to decrease, there is a need for high resolution patterning of device features. The need for smaller surface area for components, such as capacitors or transistors, along with the requirement to maintain high-reliability electrical connections, have led researchers to seek new materials and methods for fabricating semiconductor components.

For example, promising candidates for materials for capacitor electrodes used in integrated circuits memory structures include noble metals, i.e., platinum (Pt), palladium (Pd), iridium (Ir), ruthenium (Ru), rhodium (Rh), osmium (Os), silver (Ag) and gold (Au), as wells as their oxides, e.g., ruthenium oxide (RuO_2), iridium oxide (IrO_2) or osmium oxide (OsO_2). The above-mentioned noble metals, of which platinum (Pt) is the most common, are all physically and chemically similar. They are either relatively stable metals or form conductive oxides. Their capacitance remains constant even when exposed to oxidizing or reducing atmospheres common to semiconductor fabrication. These metals are also resistant to hydrogen damage and do not affect the polarization of dielectric layers after annealing at high temperatures.

Recently, particular attention has been given to using platinum (Pt) for electrodes mainly because platinum has a very low reactivity and is inert to oxidation, thus preventing electrode oxidation which decreases a capacitor's capacitance. Platinum also has a high electrical conductivity and a lower leakage current than that of other electrode materials, such as for example, ruthenium oxide or poly-silicon. Further, platinum has a high work function. Work function is an important feature of an electrode material for a DRAM capacitor and is a measure of the energy required to remove one electron from the metal. Advanced DRAM capacitors are characterized by a dominant current leakage mechanism, known as the Schottky emission from the electrode into the dielectric so that metals with high work functions, like platinum, produce less current leakage.

The use of platinum as the material of choice for capacitor electrodes, however, poses significant problems. One problem arises from the difficulty of etching and/or polishing platinum and the corresponding need to precisely etch the platinum into the shape of the desired capacitor electrode. The etching process, which is repeated many times in the formation of semiconductor devices, typically employs at least one chemical etchant that reacts with, and removes, the film or layer that is etched. Noble metals such as platinum, however, are not highly reactive with conventional chemical etchants. Consequently, noble metals require specialized etching methods and/or highly-reactive chemical etchants in the etching process.

Two methods are currently being used to etch platinum. The first method is isotropic etching, such as wet etching with aqua regia (mix ratio of concentrated

hydrochloric acid: concentrated nitric acid: water = 3:1:4). This wet etching, however, offers a very low degree of precision. Consequently, wet etching is not accurate enough for many fine pattern processes, such as patterning DRAM devices, rendering it difficult to perform submicron patterning of platinum electrodes.

5 The second method is anisotropic etching, such as ion beam milling, under which ions, e.g., argon ions, are generated by a magnetically confined RF or DC plasma and bombard an exposed platinum surface. While the ion beam milling process is used to define and form high resolution patterns from a blanket platinum layer, this process is typically not selective to many masking materials as well as to the
10 layers underlying the platinum layer. Further, ion beam milling processing removes most materials at about the same rate, making process control very difficult as the ion beam may remove material underlying a protective mask as well as unwanted material.

 Accordingly, there is a need and desire for an improved method of patterning metal surfaces during the formation of semiconductor device components, e.g.,
15 capacitors. There is also a need and desire for high-resolution patterning of noble metal layers, e.g., platinum, during the formation of a lower capacitor electrode, as well as a method of increasing the processing accuracy in etching a noble metal surface.

SUMMARY OF THE INVENTION

20 The present invention provides a method for patterning metal surfaces employed in the formation of various semiconductor device components, such as

capacitors, as well as a method for increasing processing accuracy in polishing metal surfaces.

In an exemplary embodiment, a metal surface is patterned by electro-mechanical polishing to form the bottom electrode of a DRAM capacitor. To form the bottom electrode, an insulating layer is formed over a contact plug that is in electrical contact with a transistor gate stack. A container opening is formed in the insulating layer to expose the contact plug. A metal layer is deposited in the container structure and on the exposed surface of the insulating layer. A photoresist layer is deposited over the metal layer, forming a plug in the container. The photoresist layer is chemically mechanically polished to expose the surface of the metal layer outside the container. The surface of the metal layer outside the container structure is electro-mechanically polished against a second surface while submersed in an electrolytic bath. The metal surface and polishing pad are connected to an electrical source and a current is supplied to them during polishing. The metal surface is polished until the metal outside the container is removed. The photoresist is removed from the container exposing the surface of the metal surface inside the container. In an exemplary embodiment, platinum is used as the metal layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other advantages and features of the invention will become more apparent from the detailed description of the preferred embodiments given below with reference to the accompanying drawings in which:

Figure 1 is an illustration of a DRAM CMOS gate structure, upon which a capacitor bottom electrode will be formed according to a method of the present invention;

Figure 2 is a partial view of the Figure 1 structure at a stage of processing
5 subsequent to that shown in Figure 1;

Figure 3 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 2;

Figure 4 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 3;

10 Figure 5 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 4;

Figure 6 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 5;

15 Figure 7 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 6;

Figure 8 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 7;

Figure 9 is an illustration of an exemplary electro-mechanical polishing apparatus according to an embodiment of the present invention;

Figure 10 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 8;

Figure 11 is a view of the Figure 1 structure at a stage of processing subsequent to that shown in Figure 10;

5 Figure 12 is a view of two capacitors of a DRAM device formed according to a method of the present invention; and

Figure 13 is an illustration of a computer system having a memory device with at least one metal surface patterned in accordance with the present invention.

10 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

The present invention will be described as set forth in the preferred or exemplary embodiments of the detailed description and as illustrated in Figures 1-13. These embodiments are described with sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be employed, and that structural, logical, and electrical changes may be made without departing from the spirit or scope of the present invention.

15

The term "substrate" used in the following description may include any semiconductor-based structure that has an exposed silicon surface. Structure must be understood to include silicon, silicon-on insulator (SOI), silicon-on sapphire (SOS), doped and undoped semiconductors, epitaxial layers of silicon supported by a base

20

semiconductor foundation, and other semiconductor structures. The semiconductor need not be silicon-based. The semiconductor could be silicon-germanium, germanium, or gallium arsenide. When reference is made to substrate in the following description, previous process steps may have been utilized to form regions or junctions in or on the base semiconductor or foundation.

The term "noble metal" is intended to include not only elemental noble metals, i.e., platinum (Pt), palladium (Pd), iridium (Ir), ruthenium (Ru), rhodium (Rh), osmium (Os), silver (Ag), gold (Au), and their oxides, but also noble metals with other trace metals or in various alloyed combinations with other metals as known in the semiconductor art, as long as such alloys retain the physical and chemical properties of the noble metal.

The term "refractory metal" is intended to include metals which offer low contact resistance and includes not only elemental refractory metals but refractory metals with other trace metals or in various alloyed combinations with other metals as known in the semiconductor art, as long as such alloy retain the physical and chemical properties of the refractory metals. Refractory metals and their nitrides of particular interest are titanium (Ti), tungsten (W), tantalum (Ta), molybdenum (Mo), titanium nitride (TiN), tungsten nitride (WN), and tantalum nitride (TaN).

The present invention provides a method for patterning metal surfaces, such as noble and refractory metals, during the formation of integrated circuit components, such as capacitors, transistors, resistors, conductor layers, conductive plugs,

metalization layers, gate metals, interconnects, electrodes, electrical contacts, electrical
vias, and bonding pads. The invention uses electro-mechanical polishing (EMP) for
the high-resolution patterning of a metal surface to form various geometric features of
semiconductor memory structures. In one exemplary embodiment, the feature is a
5 capacitor bottom electrode. The method of the present invention also improves the
processing accuracy in patterning such metals. The invention is described in relation
to an exemplary embodiment in which EMP is used to form a bottom electrode of a
capacitor of a DRAM device. It should be noted, however, that the EMP method
could be used on numerous metal surfaces of integrated circuit devices and is not
10 limited by the description of the exemplary embodiment.

Referring now to the drawings, where like elements are designated by like
reference numerals, Figure 1 illustrates a DRAM memory cell at an intermediate stage
of fabrication, in which a pair of capacitor memory cells 86, 87 (Figure 12) having
respective access transistors 32, 33 are to be formed on a substrate 20. The Figure 1
15 structure includes a well 30 in the upper portion of the substrate 20, which is typically
doped to a predetermined conductivity, e. g., p-type or n-type depending on whether
NMOS or PMOS transistors will be formed therein. Also shown are field oxide
regions 26, for use as source/drain regions, and four gate stacks 31-34 formed
according to well-known semiconductor processing techniques. Each gate stack 31-
20 34 includes a gate oxide region 39, gate electrode 38, conductive layer 37, cap layer
36, and an insulating layer or gate stack spacer 35. The insulating layers 35 and field
oxide regions 26 are covered with a second insulating layer 50, which could be, for

example, silicon oxide (SiO_x), borophosphosilicate glass (BPSG), borosilicate glass (BSG), phosphosilicate glass (PSG) or other suitable materials. After depositing insulating layer 50, the upper surface 53 of insulating layer 50 may undergo a chemical mechanical polishing (CMP) step. Any CMP technique can be used to
5 polish the upper surface 53.

Reference is now made to Figure 2, which for simplicity illustrates only one transistor gate stack pair 31, 32 from Figure 1. This is a region where a contact plug 52 (Figure 3) and an overlying capacitor structure 86 (Figure 12), including a capacitor bottom electrode 73 (Figure 12) will be formed according to a method of
10 the present invention. One method to create contact opening 51 (through insulating layer 50 to source/drain region 26) is to deposit a photoresist material on layer 50 and pattern the opening using conventional photolithography steps. After patterning, opening 51 is formed in the photoresist material and insulating layer 50 using well known techniques. After the opening is formed, the remaining photoresist material is
15 removed using known techniques. Opening 51 extends to source/drain region 26 of well 30 between gate stacks 31, 32.

Referring to Figure 3, opening 51 is filled with a conductive material, such as doped polysilicon, to form a contact plug or contact filler 52. After conductive layer is deposited it is planarized down to insulating layer upper surface 53. The contact plug
20 52 can optionally be formed in multiple-layers to include a conductive barrier layer at the top of plug 52.

Figure 4 illustrates the deposition of insulating layer 60, which could be, for example, a silicon oxide (SiO_x), borophosphosilicate glass (BPSG), borosilicate glass (BSG), phosphosilicate glass (PSG), or tetraethylortho silicate (TEOS). The third insulating layer 60 is deposited over contact plug 52 and second insulating layer 50.

Referring to Figure 5, using the same fabrication technique as that used for the formation of contact opening 51 (Figure 2) or other techniques, an opening 61 is formed through insulating layer 60.

Referring to Figure 6, after forming opening 61, metal layer 70 is deposited over insulating layer 60 and into opening 61. Although any of the metals mentioned above, along with their alloys and oxides, may be used for forming metal layer 70, it is desirable to use platinum. A portion of metal layer 70 will form the bottom electrode 73 (Figure 11) of capacitors 86, 87 (Figure 12). Metal layer 70 could be formed over conductive plug 52 by any conventional method, such as chemical vapor deposition or sputtering, to a thickness of approximately 1000 Angstroms or less, preferably less than 500 Angstroms. Optionally, metal layer 70 could completely fill opening 61 to form a plug type bottom electrode (not shown).

Referring now to Figure 7, opening 62 (Figure 6) is filled with a photoresist material 80, for example, by spin coating the material 80 at room temperature and then solidifying it. The photoresist material 80, which can be any photochemical resin used in the semiconductor industry, may then be planarized by CMP down to or near planar surface 82 of metal layer 70 to form photoresist plug 81 (Figure 8). The photoresist plug 81 acts as a protective cover for metal layer 70 located inside opening

62. The photoresist plug 81 does not protect, however, region 71 of metal layer 70 located outside the opening 62. It should be noted that photoresist is optional and metal layer 70 can undergo the EMP directly as described below in accordance with Figure 9.

5 After formation of the photoresist plug 81, planar surface 82 undergoes EMP in polishing system 200 (Figure 9) to remove a region 71 of metal layer 70 to form bottom electrode 73 of capacitors 86, 87 (Figure 12). To understand the electrical mechanical polishing method of the present invention, a brief description of prior art electropolishing process is provided. Electropolishing, also called “reversed plating,”
10 is the electrolytic removal of a metal material in a highly ionic solution by means of an electrical potential and current. Electropolishing is accomplished by connecting a metal surface to the negative terminal (the anode) of a power supply. The metal surface is then immersed in an electrolytic bath, for example, a hydrochloric acid bath, which could contain metal plates, which typically line the edges of the processing tank
15 and are connected to the positive terminal (the cathode) of a power supply. Since the metal surface is electrically conductive, a closed circuit is formed and current is transferred to the surface of the metal.

 In electropolishing, as the current is being applied, the metallic material reacts with the electrolytes from the electrolytic bath to form an anodic film. This film,
20 essentially conforms to the general contour of the surface of the exposed metal surface. The anodic film is removed through chemical complexing reactions or mechanical force. It is important to note that as the metallic material thickness

decreases, the resistance or insulation properties of the metallic material increase.

Overall, the amount of metal removed depends upon the chemical composition of the metal, temperature and agitation of the electrolytic bath, spatial relationship of the anode and cathode, intensity of current, and the length of time the current is flowing and mechanical force applied.

In a first exemplary embodiment, planar surface 82 (Figure 8) undergoes EMP in polishing system 200 (Figure 9). The wafer 203 containing planar surface 82 is inserted into a wafer holder 202 with surface 82 exposed. Wafer holder 202 is then inserted into tank 201 containing an electrolytic fluid or acidic solution 205, pad 210, and pad support 230. The wafer surface 82 is electrically connected to a negative terminal 241 of power source 240. The wafer holder 202 is lowered until exposed surface 82 contacts pad surface 220, which is electrically connected to positive terminal 242 of a power source 240. When the two surfaces 82 and 220 are touching a closed electrical circuit is formed with the power source 240. The power source 240 provides either a constant or pulsed current to the wafer surface 82 and pad surface 220. The amount of voltage will vary depending on the metal layer 70 thickness and polishing criteria. The wafer holder 202 may rotate in a random or fixed pattern relative to the pad surface 220. Optionally, pad surface 220 is stationary or moves in a random or fixed pattern relative to the wafer holder 202. A force may be applied to planar surface 82 by either the wafer holder 202, the abrasive pad 220 or both.

In another exemplary embodiment, the pad 210 contains fixed abrasive particles. The abrasive particles should have low solubility oxides in acidic solutions,

such as cerium oxide (CeO_2) or silicon dioxide (SiO_x). The abrasive pad 210 assists planarization by decreasing the boundary layer and/or increasing the stress at the sharpest surface of the metal surface 82. In general, the sharpest surface features sticking out through the boundary layer dissolve faster than metal not sticking out.

5 In yet another exemplary embodiment, the fluid 205 may contain solid particles, such as polyurethane, cerium oxide (CeO_2) or silicon dioxide (SiO_x) and forms a slurry or viscous liquid. The fluid is preferably an acidic solution, such as a mixture of hydrogen chloride (HCl) and water (H_2O), at a ratio of 1 to 10 saturated in potassium chloride (KCl) solution. When the metal layer 70 is platinum (Pt), the
10 anodic voltage will generate a thin layer of platinum oxide, which is subsequently dissolved as PtCl_4^{2-} or other complex forms. Likewise, when fixed particles are placed on pad 210, secondary complex reactions can include XOH_2ClPt . It is to be understood that the given chemical composition of the electrolytic fluid 205 is exemplary and additional compounds are within the scope of the invention

15 It must be noted that planar surface 82 of Figure 9 undergoes EMP for a time sufficient to allow the top surface 84 of bottom electrode 73 (Figures 10-12) to be recessed down to the planar surface 62 of insulating layer 60. After a suitable amount of polishing, as determined by endpoint controls such as coulometry, time, current, and visual techniques, the polishing is completed. The time for a 500 to 1000
20 angstrom thick platinum is preferably in the range of 30 to 200 seconds (depending upon the thickness and properties of metal surface 82). The wafer 203 is removed from the processing tank 201 and the wafer 203 is inserted into a first rinse tank (not

shown), filled with deionized water, where the anode film is rinsed off by immersion. Next, the wafer 203 is taken to a second rinse station (not shown), also filled with deionized water, to remove any remaining traces of the anode film. The resulting structure after EMP is shown in Figure 10. Metal region 71 (Figure 8) was removed while portions of metal layer 70, protected by photoresist plug 83, remains.

Next, photoresist plug 83 is removed using conventional techniques, such as ashing or etching, to form opening 85 (Figure 11). Upon removal of the photoresist plug 83, the processing steps for the fabrication of capacitors 86, 87 (Figure 12) proceed according to well-known methods. As such, a dielectric layer 72 (Figure 12) can be formed over bottom electrode 73 (Figure 12) by conventional methods, e.g., deposition or spin coating, to a thickness of about 100 Angstroms. Increasingly popular materials for the dielectric layer 72 are the ferroelectrics, such as PZT (lead, zirconateme, and titanate) or BaTiO₂ (barium titanite). However, other conventional insulating materials, such as silicon oxides, silicon nitrides, silicon oxynitrides or carbides, may be used also, in accordance with the processing requirements and the characteristics of the particular IC device. Further, high-dielectric constant materials, such as titanium oxide (TiO₂) barium oxide (BaO) tantalum oxide (Ta₂O₅) or ruthenium oxide (Ru₂O₃), may be used, according to the characteristics of the particular IC devices to be subsequently constructed.

Continuing, upper electrode 74 (Figure 12) is formed overlying the dielectric layer 72 by any conventional method, such as deposition or sputtering, to a thickness of approximately 50 to 300 Angstroms, more preferably of about 100 Angstroms.

The upper electrode 74 may be formed of a noble metal, such as platinum, or of any other suitable material previously listed for metal layer 70. Capacitors 86, 87(Figure 12) consists of bottom electrode 73, dielectric layer 72, and upper electrode 74.

Further well-known processing steps to create a functional memory cell containing capacitors 85, 86 (Figure 12) may be carried out after formation of capacitors 86, 87.

The above described inventions have the advantage of improving the patterning of metal surfaces, e.g., DRAM platinum capacitor bottom electrodes, thus allowing reduction in feature sizes and improving process yields. In addition, a bigger surface area can be processed at a time, thus reducing fabrication time and steps.

Moreover the use of electrolytic techniques reduces the mechanical force required to remove metal surfaces during polishing. Finally the electrolytic bath reduces cavities or scratches in processed metal surfaces.

Figure 13 shows a typical processor based system 400 which includes an DRAM memory circuit 448, containing a Metal Insulator Metal (MIM) capacitor with a metal surface fabricated according to the present invention is illustrated in Figures 1-12. Processor system 400 generally comprises a central processing unit (CPU) 444, e.g., a microprocessor, a digital signal processor, or other programmable digital logic device, which communicates with an input/output (I/O) device 446 over a bus 452. The memory 448 communicates with the central processing unit 444 over bus 452.

In the case of a computer system, the processor system 400 may include peripheral devices such as a floppy disk drive 454 and a compact disk (CD) ROM drive 456 which also communicate with CPU 444 over the bus 452. Memory 448 is preferably constructed as an integrated circuit, which includes at least one metal surface formed by electro-mechanical polishing as previously described in connection with Figures 1-12. The memory 448 may also be combined with the processor, e.g. CPU 444, on a single integrated circuit chip.

Having thus described in detail the preferred embodiments of the invention, it is to be understood that the invention defined by the appended claims is not to be limited by particular details set forth in the above description as many apparent variations thereof are possible without departing from the spirit or scope of the invention. Accordingly, the above description and accompanying drawings are only illustrative of preferred embodiments which can achieve the features and advantages of the present invention. It is not intended that the invention be limited to the embodiments shown and described in detail herein. The invention is only limited by the scope of the following claims.

What is claimed as new and desired to be protected by Letters Patent of the United States is:

1. A method of patterning a metal, said method comprising the steps of:

placing a surface of said metal in fluid communication with a second surface by placing
5 said metal and said second surface in a fluid bath;

supplying a current to the metal surface and said second surface; and

moving at least one of the surfaces relative to the other.

2. The method of claim 1, wherein the metal comprises at least one metal from
the group consisting of noble metals, noble metal alloys, refractory metals, and
10 refractory metal alloys.

3. The method of claim 1, wherein the metal comprise platinum.

4. The method of claim 1, wherein the metal has a thickness of less than
approximately 1000 angstroms.

5. The method of claim 1, wherein the fluid comprises an acid.

6. The method of claim 1, wherein the fluid comprises hydrochloric acid, water, and potassium chloride.

7. The method of claim 1, wherein the fluid comprises at least one abrasive particle selected from the group consisting of cerium oxide (CeO_2), silicon oxide (SiO_x), and aluminum oxide.

8. The method of claim 1, wherein the second surface comprises a conductive material.

9. The method of claim 8 wherein the second surface comprises a conductive polymer.

10. The method of claim 8 wherein the second surface comprises a conductive oxide.

11. The method of claim 8 wherein the second surface comprises a polymer containing conductive particles.

12. The method of claim 1, wherein the second surface comprises at least one polishing surface containing abrasive materials.

13. The method of claim 9, wherein said fixed abrasive particle comprises at least one abrasive particle selected from the group consisting of cerium oxide (CeO_2), silicon oxide (SiO_x), and aluminum oxide.

14. The method of claim 1 further comprising providing a working electrode in
5 said fluid bath.

15. The method of claim 1 wherein said second surface comprises a pad.

16. The method of claim 15 wherein said pad contains abrasive materials.

17. The method of claim 1, wherein said current supplying step is performed by applying a pulsed current to the metal surface and said second surface.

18. The method of claim 11, wherein said current is supplied for approximately
200 seconds or less.

19. The method of claim 1, wherein said current supplying step is performed by applying a constant current to the metal surface and said second surface.

20. The method of claim 1, wherein a force is applied to said surfaces, at least one
15 of which is moving relative to the other.

21. A method of patterning at least one metal of a semiconductor device, said method comprising the steps of:

placing a surface of said metal in fluid communication with a second surface by placing said metal and said second surface in a fluid bath;

5 supplying a current to the metal surface and said second surface; and

moving at least one of the surfaces relative to the other.

22. The method of claim 21, wherein the metal comprises at least one metal from the group consisting of noble metals, noble metal alloys, refractory metals, and refractory metal alloys.

10 23. The method of claim 21, wherein the semiconductor devices comprises at least one device from the group consisting of capacitor, transistor, resistor, conductor layer, conductive plug, metalization layer, gate metal, interconnect, electrode, electrical contact, electrical via, and bonding pad.

24. A method of patterning at least one metal of a memory element of a
15 semiconductor device, said method comprising the steps of:

placing a surface of said metal in fluid communication with a second surface by placing said metal and said second surface in a fluid bath;

supplying a current to the metal surface and said second surface; and

moving at least one of the surfaces relative to the other.

- 5 25. The method of claim 24, wherein the metal comprises at least one metal from the group consisting of noble metals, noble metal alloys, refractory metals metal, and refractory metal alloys.

26. A method of patterning a capacitor electrode of a DRAM memory device, said method comprising the steps of:

- 10 placing a surface of the electrode in fluid communication with a second surface by placing said electrode surface and said second surface in a fluid bath;

supplying a current to said electrode surface and said second surface; and

moving at least one of the surfaces relative to the other.

27. The method of claim 26 wherein said electrode comprises at least one metal
15 from the group consisting of noble metals, noble metal alloys, refractory metals metal, and refractory metal alloys.

28. The method of claim 26, wherein said electrode comprises at least one metal from the group consisting of noble metals, noble metal alloys, refractory metals metal, and refractory metal alloys.

29. A method of forming a semiconductor device, comprising the steps of:

5 forming a conductive layer over an insulating layer;

forming a metal layer over said conductive layer;

forming a protective layer over portions of said metal layer, leaving other portions of said metal layer exposed; and

electro-mechanical polishing said exposed portions of said metal layer.

10 30. The method of claim 29, wherein said metal layer comprises at least one metal from the group consisting of noble metals, noble metal alloys, refractory metals, and refractory metal alloys.

31. The method of claim 29, wherein said protective layer comprises a photoresist material.

15 32. The method of claim 29 wherein said protective layer comprises a spin on glass.

33. The method of claim 29, further comprising the step of forming an opening into said insulating layer, said conductive layer, metal layer, said protective layer being formed in said opening.

34. The method of claim 29, wherein said metal layer forms a bottom capacitor electrode of said semiconductor device.

35. A method of forming a capacitor electrode, said method comprising the steps of:

forming an electrode by depositing a metal in a container structure in electrical communication with a conductive layer;

10 covering an exposed surface of the metal inside said container with a protective material;

placing the exposed surface of the metal in fluid communication with a second surface by placing the exposed metal surface and said second surface in a fluid bath;

supplying a current to the metal surface and said second surface; and

15 moving at least one of the surfaces relative to the other.

36. The method of claim 35, wherein said capacitor electrode is a bottom electrode.

37. A method of forming a lower electrode of a capacitor on a semiconductor substrate, comprising the steps of:

5 forming a first opening into a first insulating layer provided over said semiconductor substrate;

forming a conductive plug in said first opening;

forming a second insulating layer over said conductive plug and said first insulating layer;

10 forming a second opening into said second insulating layer over said conductive plug;

forming a metal layer in said opening and over at least a portion of said second insulating layer;

forming a protective layer over portions of said metal layer, leaving other portions of said metal layer exposed; and

15 electro-mechanical polishing said exposed portions of said metal layer.

38. The method of claim 37, wherein said electrode comprises at least one metal from the group consisting of noble metals, noble metal alloys, refractory metals metal, and refractory metal alloys.

39. A semiconductor device comprising:

5 a substrate; and

at least one electro-mechanical polished metal layer formed over said substrate.

40. The semiconductor device of claim 39, wherein said metal layer comprises at least one metal selected from the group consisting of noble metals, noble metal alloys, refractory metals, and refractory metal alloys.

10 41. The semiconductor device of claim 39, wherein said device comprises a capacitor with at least one electro-mechanical polished metal layer.

42. The semiconductor device of claim 41, wherein said electro-mechanical polished metal layer is a bottom electrode of said capacitor.

43. A semiconductor capacitor comprising:

15 a bottom electrode formed over a substrate;

an insulating layer formed over said bottom electrode; and

a top electrode formed over said insulating layer, wherein at least one electrode surface comprises an mechanical-electro polished surface.

44. The capacitor of claim 43, wherein said capacitor is a MIM capacitor.

45. The capacitor of claim 43, wherein at least one electrode comprises a metal
5 selected from the group consisting of noble metals, noble metal alloys, refractory
metals, and refractory metal alloys.

46. The capacitor of claim 43, wherein said at least one electrode surface is a
surface of said bottom electrode.

47. The capacitor of claim 38, wherein the bottom electrode comprises a platinum
10 electrode.

48. A processor system comprising:

a processor; and

a memory device electrically coupled to said processor, said memory device comprising

a substrate; and

15 a capacitor formed over said substrate, said capacitor comprising at least one electro-
mechanically polished layer provided over said substrate.

ABSTRACT

A method of patterning a metal surface by electro-mechanical polishing is disclosed. A metal surface is placed in fluid communication with an abrasive surface of a pad. The two surfaces are moved relative to each other, in acidic fluid which
5 contains abrasive particles. An electrical circuit is formed between the metal surface and abrasive pad and a current is supplied to the circuit. The patterned surface then is processed into a useful feature such as a bottom electrode for a DRAM capacitor.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205

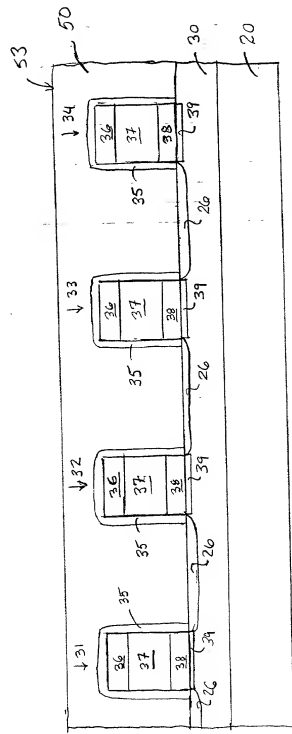


Fig. 1

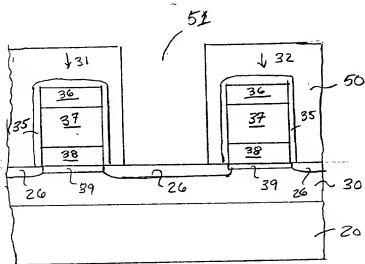


FIG. 2

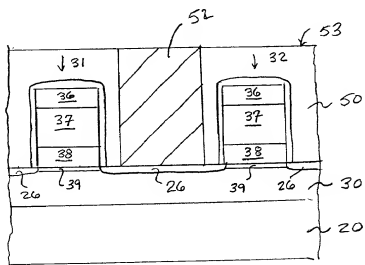


FIG. 3

FIG. 4

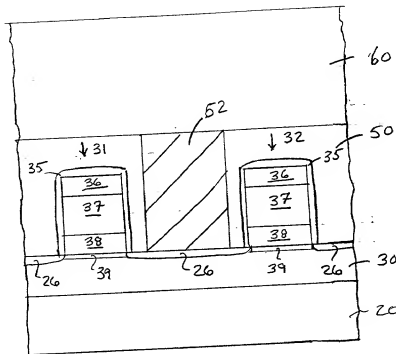


FIG. 5

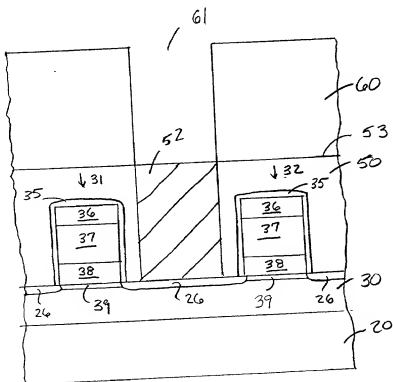


FIG. 6

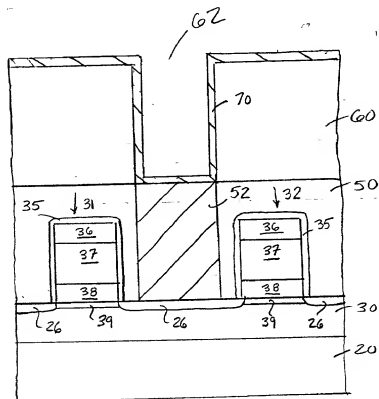
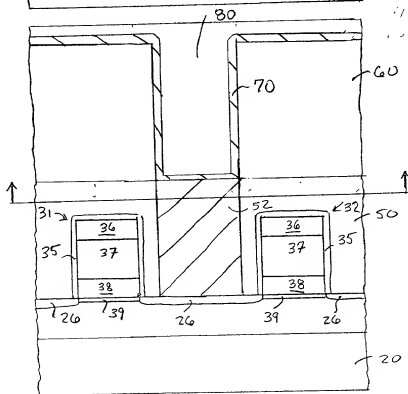
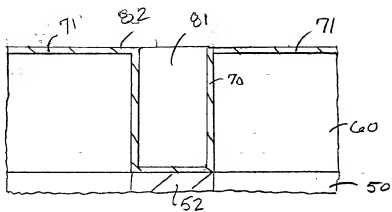


FIG. 7





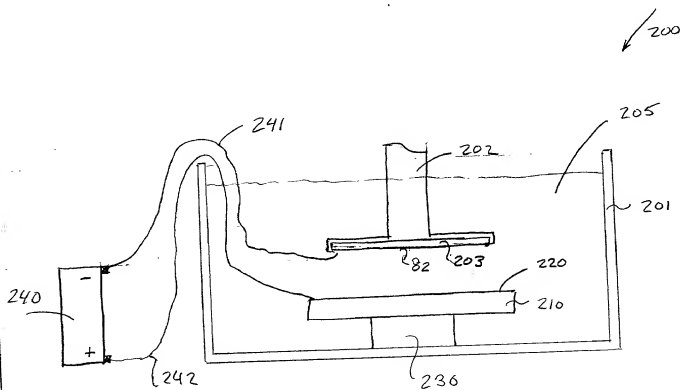


FIG. 9

FIG. 10



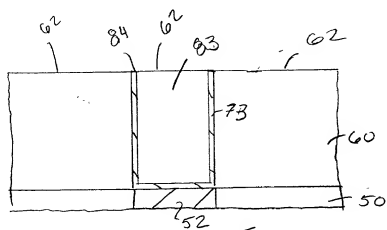


FIG. 11

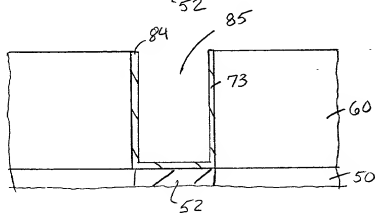

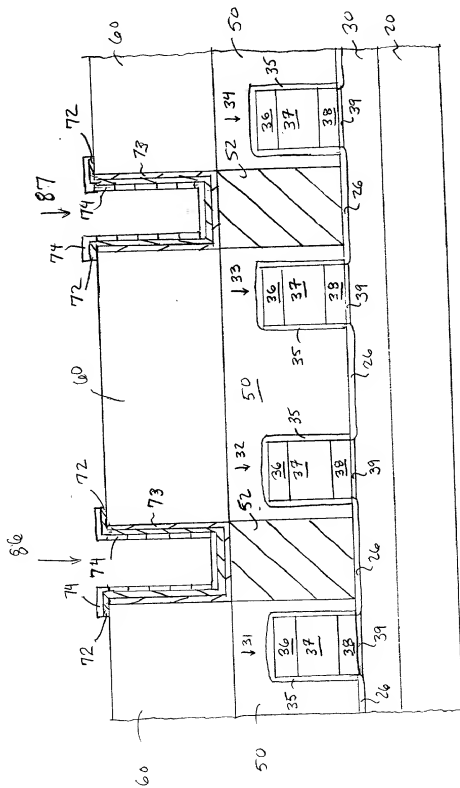

216-12

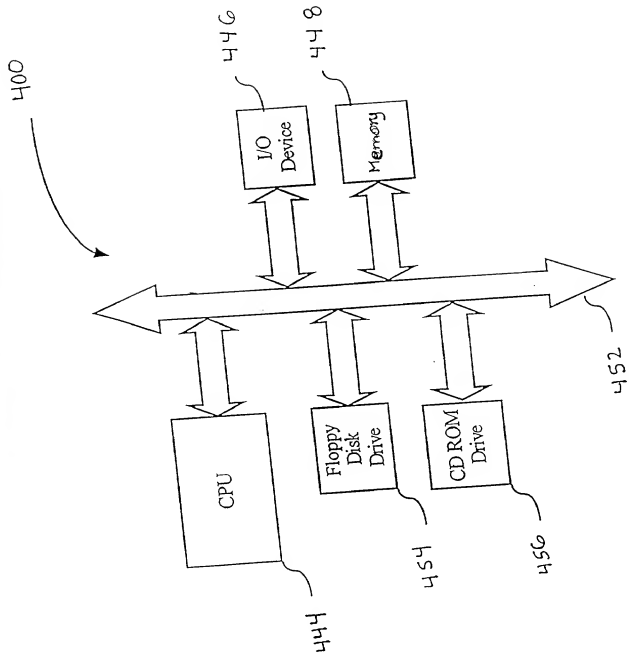


FIG. 13

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ELECTRO-MECHANICAL POLISHING OF PLATINUM
CONTAINER STRUCTURE

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code
§ 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

NONE

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

NONE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Please address all correspondence to Gabriela Coman of Dickstein Shapiro Morin & Oshinsky LLP located at 2101 L Street NW

Washington, DC 20037-1526. Telephone calls should be made to (202) 785-9700.

Full name of first inventor: Whonchee Lee

Inventor's signature: _____ Date: _____

Residence: Boise, Idaho

Citizenship: United States of America

Post Office Address: 493 S. Browning Avenue,
Boise, Idaho 83709

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
DECLARATION FOR PATENT APPLICATION

Signature Page for Second Inventor

Full name of second inventor: Scott Meikle

Inventor's signature: _____ Date: _____

Residence: Boise, Idaho

Citizenship: Canada

Post Office Address: 1301 East Jefferson
Boise, ID 83712

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:
Whonchee Lee et al.

Serial No.: Not Yet Assigned

Group Art Unit: Not Yet Assigned

Filed: August 31, 2000

Examiner: Not Yet Assigned

For: ELECTRO-MECHANICAL
POLISHING OF PLATINUM
CONTAINER STRUCTURE

Assistant Commissioner for Patents
Washington, D.C. 20231

**POWER OF ATTORNEY BY ASSIGNEE AND
CERTIFICATE BY ASSIGNEE UNDER 37 CFR § 3.73(b)**

Micron Technology, Inc., Assignee of the entire right, title and interest in the above-identified application by virtue of the Assignment attached hereto (which is also being submitted concurrently for recordation), hereby appoints the attorneys and agents of the firm of Dickstein Shapiro Morin & Oshinsky, LLP located at 2101 L Street, N.W., Washington, D.C. 20037, listed as follows: Gary M. Hoffman, 26,411; Thomas J. D'Amico, 28,371; Donald A. Gregory, 28,954; James W. Brady Jr., 32,115; Jon D. Grossman, 32,699; Mark J. Thronson, 33,082; Jeremy A. Cubert, 40,399; Laurence E. Fisher, 37,131; Brian A. Lemm, 43,748; John F. Levis, 34,210; Gianni Minutoli, 41,198; Edwin Oh, P-45,319; Eric Oliver, 35,307; William E. Powell III, 39,803; Mark E. Strickland, 45,138 and Salvatore P. Tamburo, P-45,153, and also attorneys of Micron Technology, Inc. as its attorneys with full power of substitution to prosecute this application and to transact all business in the Patent and Trademark Office in connection therewith.

The Assignee certifies that the above-identified assignment has been reviewed and to the best of the Assignee's knowledge and belief, title is in the assignee.

Please direct all correspondence regarding this application to the following:

Dickstein Shapiro Morin & Oshinsky LLP
2101 L Street NW
Telephone: (202) 785-9700
Fax: (202) 887-0689

MICRON TECHNOLOGY,

Michael L. Lynch
Chief Patent Counsel
Registration No. 30,871

Dated: _____